


# S-TRACK

## 3-Phasen-Aufbauschiene DALI

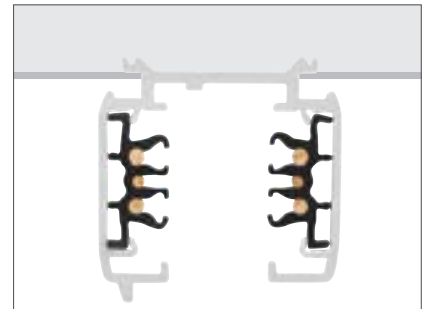

Nennspannung (V)

1 m

220-240V ~50/60Hz

1m

220-240V ~50/60Hz

max. Stromstärke (A)

16

16

mech. Belastung max.

30 kg

30 kg

Material

Aluminium

Aluminium

Farbe

■ schwarz

□ weiß

L x B x H (cm)

100 x 3,6 x 3,6

100 x 3,6 x 3,6

Art. Nr.

1004937

1004938

EUR

2 m

220-240V ~50/60Hz

2 m

220-240V ~50/60Hz

16

16

30 kg

30 kg

Aluminium

Aluminium

■ schwarz

□ weiß

200 x 3,6 x 3,6

200 x 3,6 x 3,6

1002631

1002632



Nennspannung (V)

3 m

220-240V ~50/60Hz

3 m

220-240V ~50/60Hz

max. Stromstärke (A)

16

16

mech. Belastung max.

30 kg

30 kg

Material

Aluminium

Aluminium

Farbe

■ schwarz

□ weiß

L x B x H (cm)

300 x 3,6 x 3,6

300 x 3,6 x 3,6

Art. Nr.

1002633

1002634

EUR

4 m

220-240V ~50/60Hz

4 m

220-240V ~50/60Hz

16

16

30 kg

30 kg

Aluminium

Aluminium

■ schwarz

□ weiß

400 x 3,6 x 3,6

400 x 3,6 x 3,6

1002635

1002636